


Technical Information / Data Sheet

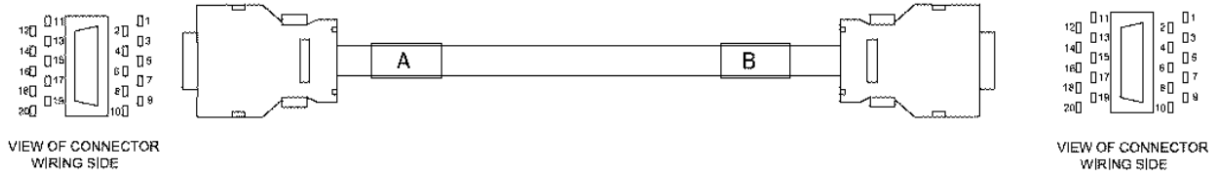

Description	I/O LINK Signal Cable, 1 Channel, PVC Insulation, Cable K1X, Length 2 m
Revision Status	AV
Normative Reference	CE/UL/CSA
Cross Section	10x2xAWG28
Bending Radius	60 mm
Speed [m/min]	120 m/min max
Acceleration [m/s ²]	5m/sec ²
Weight [kg]	0.12
Item	Connector A ; B
Specification	A02B-0120-K302
Type Description	PCR 20 PIN STD. STRAIGHT
Cable Material	LX66L-0003-0284 Signal cable, 1 X 2 X 22AWG, PUR/PVC, Shielded, not for continuous movable Application
Cable Material Specification	LX66L-0003-0284
Cable Insulation Material	PVC/PVC SHIELDED
Colour	VIOLET - DESINA
Service Temp. [°C]	-20°C- + 60°C
Operating Voltage	30 V
Insulation Resistance	>100 M Ohm/km
Dielectric Strength [V/ min]	1.5 KV eff